

# HL-BM11 KÖRÜKLÜ TİP YÜK HÜCRESİ



**HANA**  
Yük Hücreleri



IP68 çok yüksek su koruma sınıfı




## KAPASİTE

C-3

5kg  
10kg  
20kg  
100kg  
500kg

(kg)	A	B	C	D	E	F	G	H	Φ	Φ1	Φ2	Φ3
10-200	123.0	13.0	18.0	82.0	45.0	59.0	22.0	20.0	45.0	8.5	26.0	35.0
300-1000	210.0	15.0	40.0	133.0	93.0	64.0	34.0	25.0	60.0	13.0	36.0	50.0

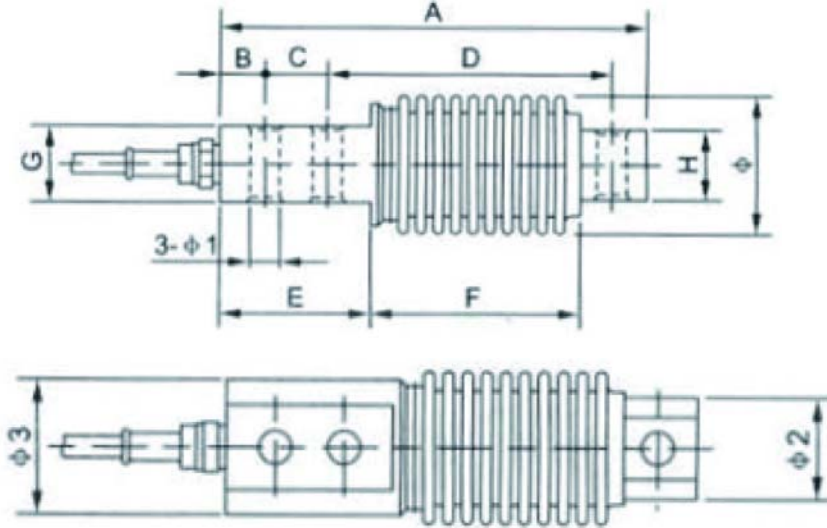

## Teknik Özellikler

Rated capacities(Emax)	10 , 50 , 200 , 250 , 500 , 750 , 1000 , 2000kg	Temperature range compensated	-10°C~ +40°C
sensitivity	1.5.0±0.002mV/V , 2.0±0.002mV/V	Temperature range operateing	-30°C~ +70°C
Total error	±0.02%F.S ; ±0.05%F.S	MAX safety overload	150%F.S
Creep error	±0.02%F.S ( 30min )	Limit overload	180%F.S
Zero balance	±1%F.S	Excitation voltage ,recommnd	10~12V DC
TCO	±0.02%F.S/10°C	Excitation voltage ,maximum	15V DC
TC SPAN	±0.02%F.S/10°C	Protection class	IP67 , IP68
Input impedance	402±10Ω ,	Construction	( Alloy Steel ) /Stainless Steel
Output impedance	350±3Ω ;	Cable	Length : 3 m Diameter : φ5.5mm
Insulation impedance	≥5000MΩ ( 100V DC )	Execution standard	GB/T7551-2008 , OIML R60

**HANA**

www.hana.com.tr



/hanaterazi f t i i n y