



HANA LOAD-CELL HL-H8C



IP67 koruma sınıfı

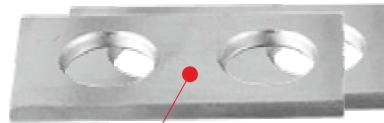

Loadcell altı montaj parçası

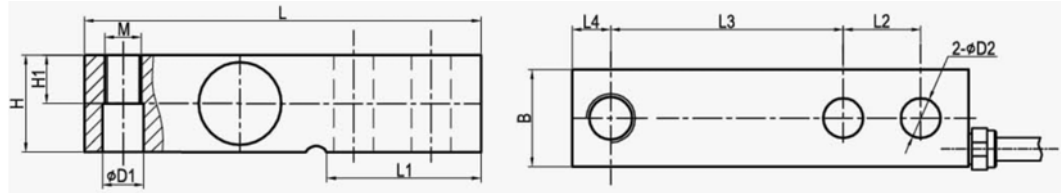

Capacity	Dimension	L	L1	L2	L3	L4	H	H1	B	D1	D2	M
0.1,0.25,0.5,1,1.5,2t		130	54	25.4	76.2	12.7	31.8	16.0	31.8	13.5	13	M12
3,5t		171.5	72.6	38.1	95.3	19	38.1	19.1	38.1	19.8	19.8	M20*1.5
7.5,10t		225.6	102	50.8	123.9	25.4	50.8	25.4	50.8	27	27	M24*2
0.1-5(SE)klb		5.12	2.13	1	3	0.5	1.25	0.63	1.25	0.53	0.51	1/2-20UNF
5-10klb		6.75	2.86	1.5	3.75	0.75	1.5	0.75	1.5	0.78	0.78	3/4-16UNF
15-20klb		8.88	4	2	4.88	1	2	1	2	1.05	1.05	1-12UNF

- Class: C3
- Excitation: 5~12VDC (NOM), 18VDC (MAX)
- Insul Res: > 5000MΩ(50VDC)
- Non-Repeatability: <0.02% of FS
- Zero Balance: <1.0% of F.S
- Temp. Sens. Zero: <0.017% F.S/10°C
- Temp. Sens. Output: $\pm 0.011\%$ F.S/10°C
- Non-linearity: 0.02% of
- F.S Hysteresis: <0.02% of F.S
- Calibration Data Rated Output: 3.0 ± 0.003 mV/V
- Combined Error: <0.02% of F.S
- Input Resistance: $385 \pm 10\Omega$
- Output Resistance: $350 \pm 2\Omega$
- Comp. Temp. Range: -10°C to 40°C
- Operating Temp: -30°C to 70°C
- Safe Overload: (150%)
- Ultimate Overload: (300%)

KAPASİTELER

C-3	0.5 t - 1 t - 2 t - 3 t
	5 t
	7.5 t - 10 t
	15 t - 20 t

