



# HANA LOAD-CELL HL-L6D

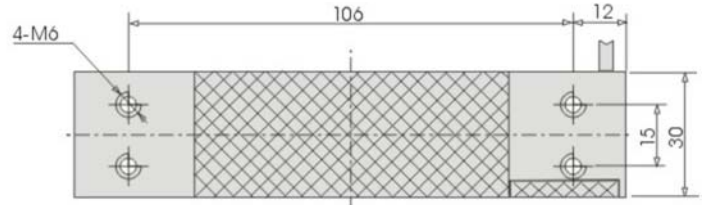

IP65 koruma sınıfı

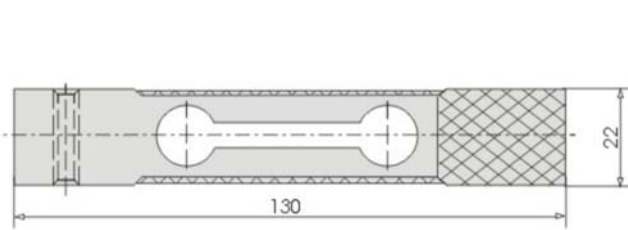

- Class: C3
- Temp. effect on span (% F.S/10°C):  $\pm 0.02/\pm 0.014$
- Comprehensive error (% F.S):  $\pm 0.02/\pm 0.017$
- Temp. effect on zero (% F.S/10°C):  $\pm 0.03/\pm 0.017$
- Rated output (mv/v) :  $2.0\pm 0.2$
- Compensated temp. range (°C) : -10 ~ +40
- Creep(%F.S/30 min) :  $\pm 0.02/\pm 0.017$
- Use temp. range (°C) : -20 ~ +60
- Zero balance (% F.S) :  $\pm 1.0$
- Excitation voltage (V) : 9 ~ 12(DC)
- Input resistance ( $\Omega$ ) :  $405\pm 10$
- Safe overload (% F.S) : 120
- Output resistance ( $\Omega$ ) :  $350\pm 3$
- Ultimate overload (% F.S) : 150
- Insulation resistance (M $\Omega$ ) :  $\geq 5000(100VDC)$

## KAPASİTELER (Kg)

C-3	3 kg
	6 kg
	10 kg
	15 kg
	20 kg
	30 kg
	35 kg
	40 kg
50 kg	