



# HANA LOAD-CELL HL-L6E

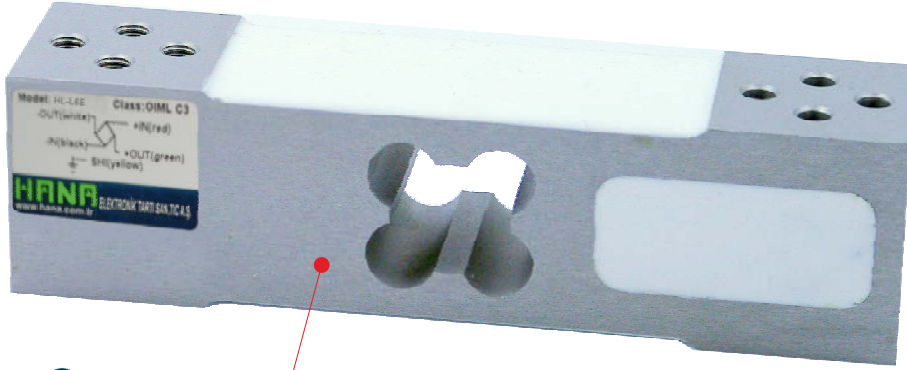

IP65 koruma sınıfı

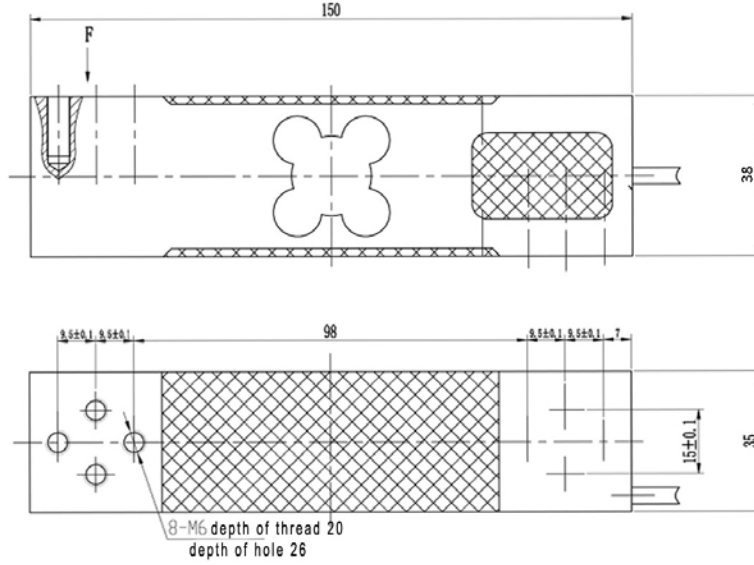

- Class: C3
- Temp. effect on span (% F.S/10°C):  $\pm 0.02/\pm 0.014$
- Comprehensive error (% F.S) :  $\pm 0.02/\pm 0.017$
- Temp. effect on zero (% F.S/10°C) :  $\pm 0.03/\pm 0.017$
- Rated output(mv/v) :  $2.0 \pm 0.2$
- Compensated temp. range (°C) : -10 ~ +40
- Creep (% F.S/30 min) :  $\pm 0.02/\pm 0.017$
- Use temp. range (°C) : -20 ~ +60
- Zero balance (% F.S) :  $\pm 2.0$
- Excitation voltage (V) : 9 ~ 12(DC)
- Input resistance ( $\Omega$ ) :  $405 \pm 10$
- Safe overload (% F.S) : 120
- Output resistance ( $\Omega$ ) :  $350 \pm 3$
- Ultimate overload (% F.S) : 150
- Insulation resistance (M $\Omega$ ) :  $\geq 5000$  (100VDC)

## KAPASİTELER (Kg)

C-3	40 kg
	100 kg
	150 kg
	200 kg