


# HANA LOAD-CELL HL-L6F



IP65 koruma sınıfı

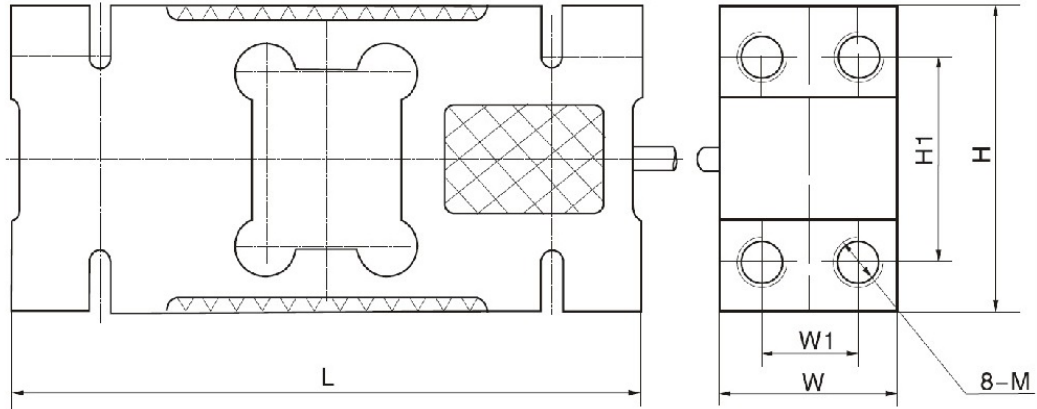

Kapasite (kg)	Ölçü	H	H1	L	W	W1	M
500		95	70	146	60	36	M12
1500 - 2000		125	95	176	76	46	M16

## Teknik Özellikler

- Class: C3
- Temp. effect on span (% F.S/10°C):  $\pm 0.02$
- Comprehensive error (% F.S):  $\pm 0.02$
- Temp. effect on zero (% F.S/10°C):  $\pm 0.03$
- Rated output (mv/v):  $2.0 \pm 0.1$
- Compensated temp. range (°C):  $-10 \square +40$
- Creep (% F.S/30 min):  $\pm 0.02$
- Use temp. range (°C):  $-20 \square +60$
- Zero balance (% F.S):  $\pm 1.0$
- Excitation voltage (V):  $9 \square 12(\text{DC})$
- Input resistance ( $\Omega$ ):  $405 \pm 10$
- Safe overload (% F.S): 120
- Output resistance ( $\Omega$ ):  $350 \pm 3$
- Ultimate overload (% F.S): 150
- Insulation resistance (M $\Omega$ ):  $\geq 5000(100\text{VDC})$

## KAPASİTE

C3

0.5 t - 1 t

2 t - 2.5 t